



**M**  
**FLOORS**  
 LAMINATE & VINYL SOLUTIONS

# SUPERIOR VINYL

## A NEW ERA IN FLOORING



- Water resistant, Non slip
- Insulates room temperature
- Sound absorbent
- Durable, Impact resistant
- Shock resistant
- Fire resistant
- Fade resistant



PRODUCT OF





**SUPERIOR VINYL**

**LIGHT COMMERCIAL**

LOWEST VOC EMISSION RATING



Foot traffic



Roll width



Total Thickness



Thickness of wear layer



Fire resistant



Slip resistant



Static electrical propensity



Weight



Expansion & contraction



Wear resistant



Sound absorption



2 m, 3 m

3,8 mm

0,3 mm

2,00 kg/m<sup>2</sup> max 0,4%

+19dB


10  
Warranty





# LIGHT COMMERCIAL

## MFVS238.AB / MFVS338.AB **ASH BLONDE**

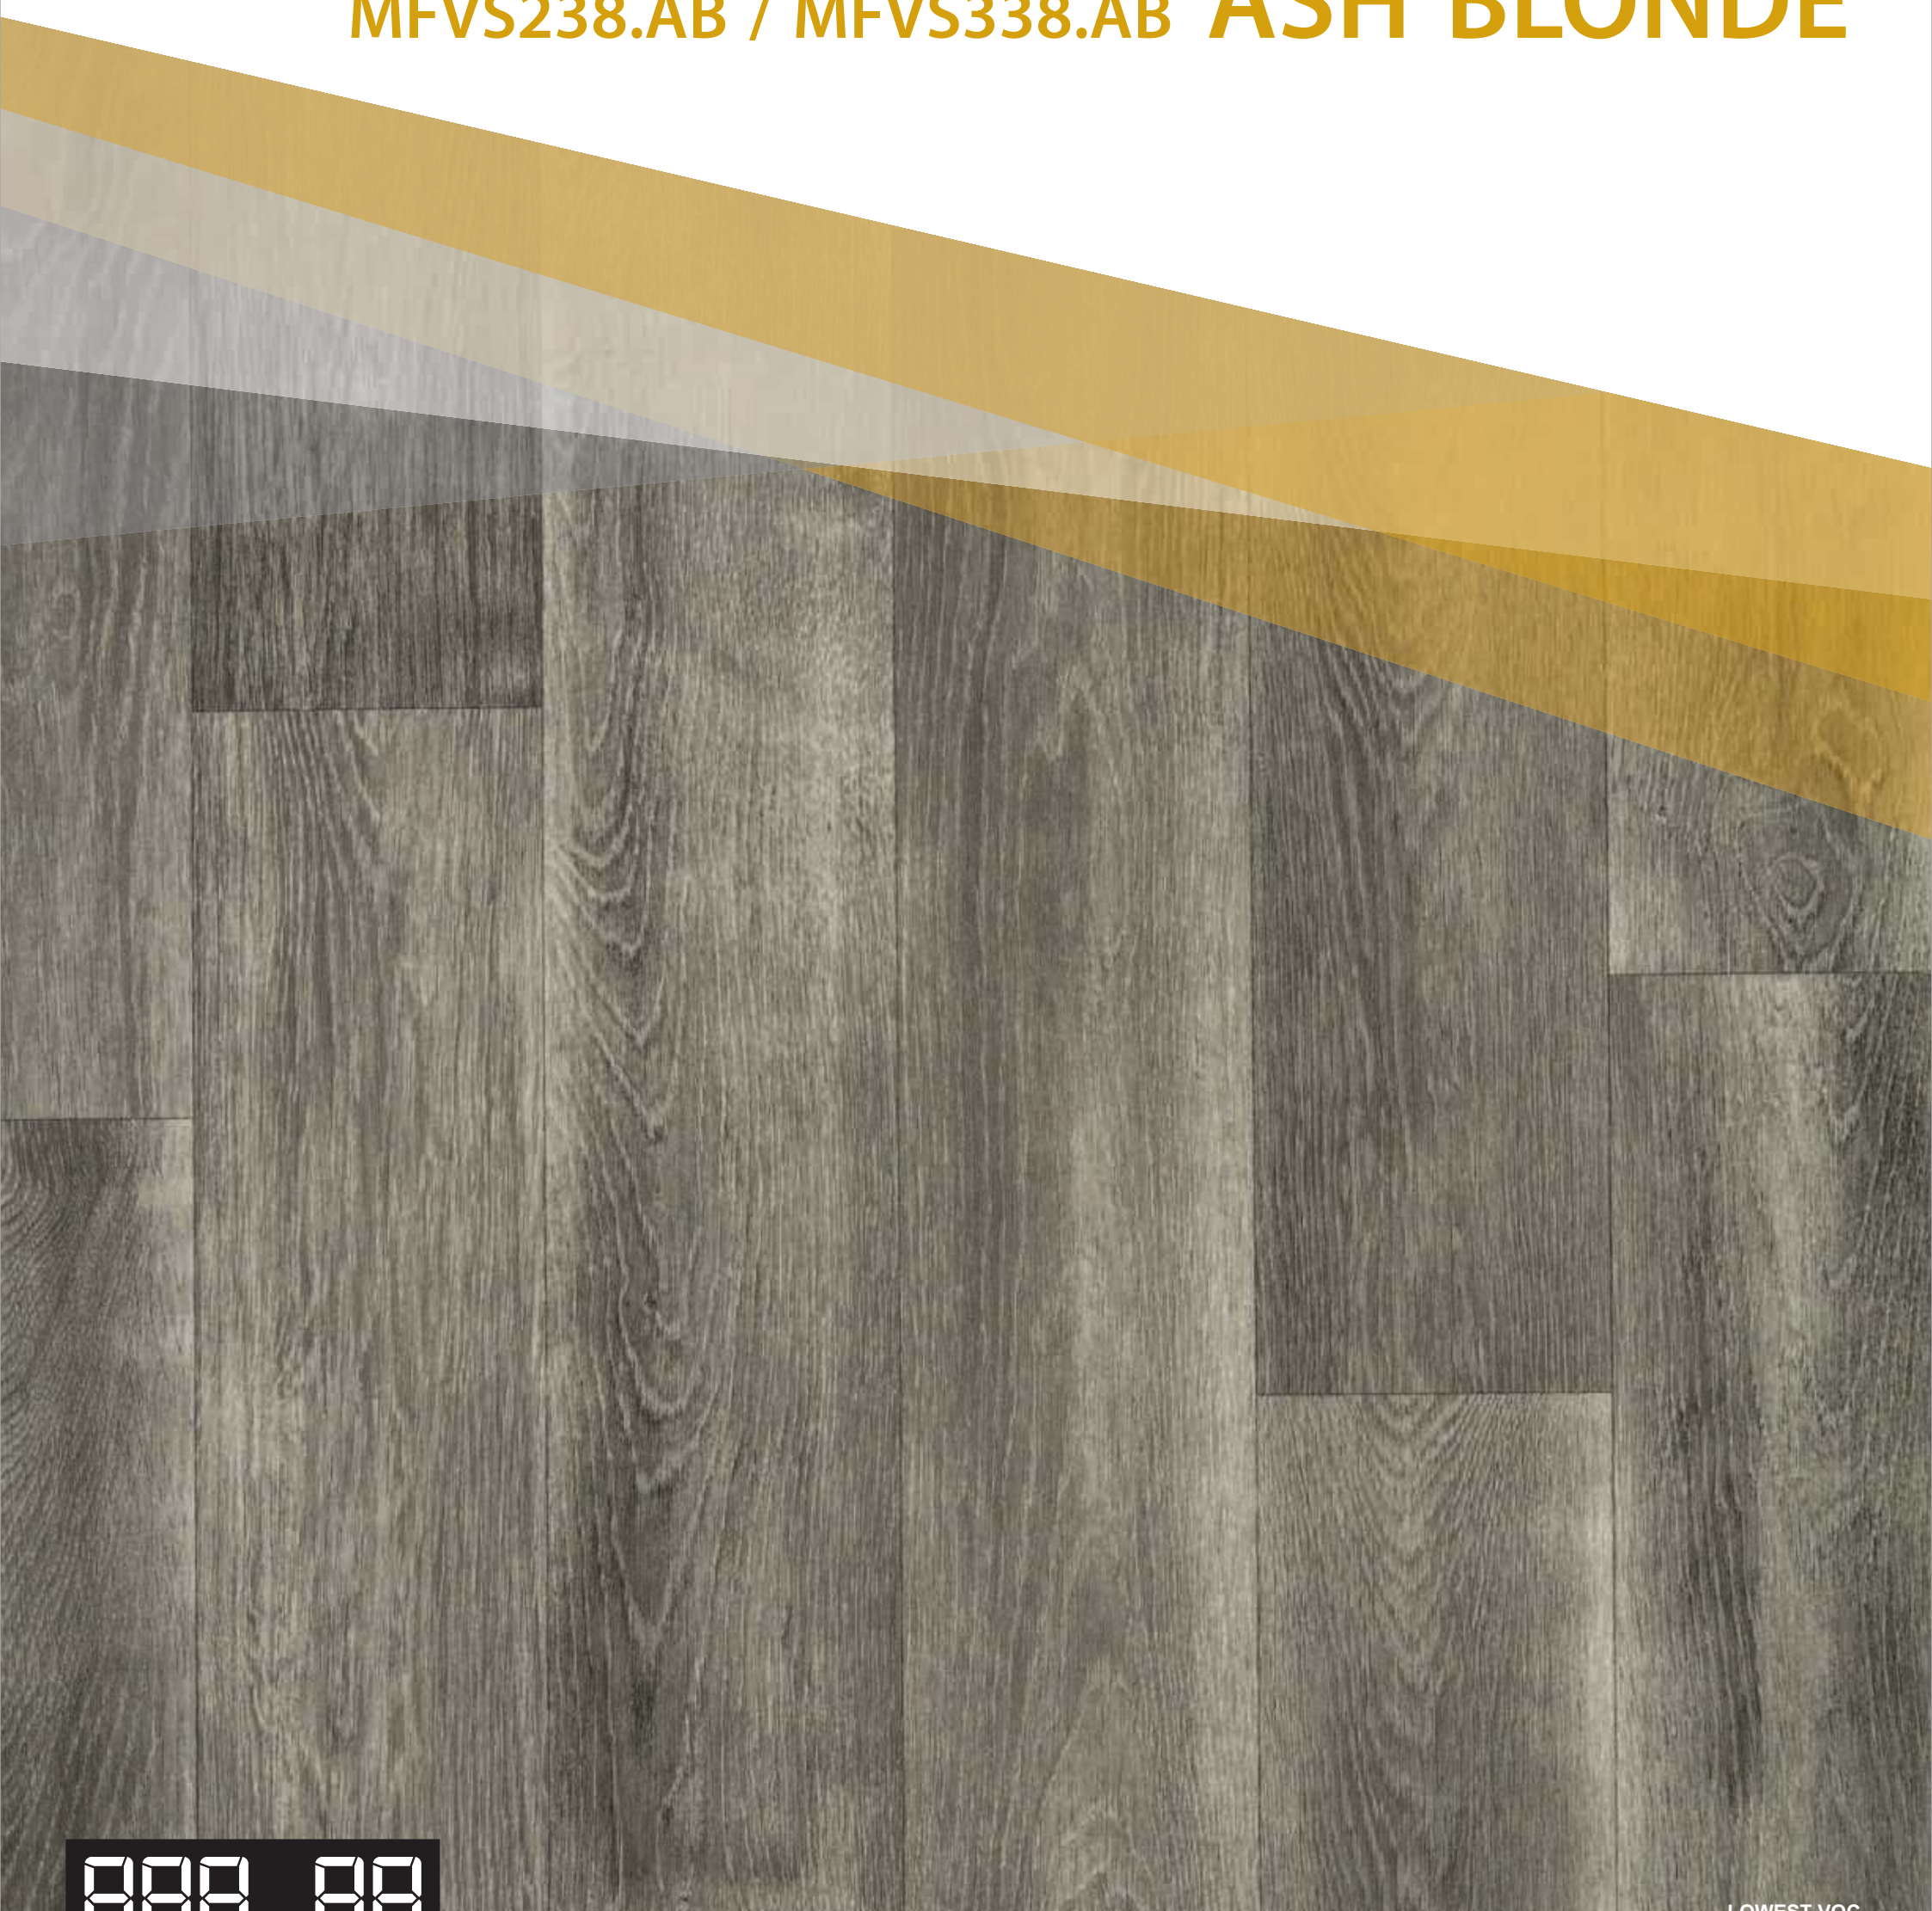

888 . 88

RAND PER SQUARE METER

LOWEST VOC EMISSION RATING



- |              |            |                 |                         |                |                |                              |        |                         |                |                  |
|--------------|------------|-----------------|-------------------------|----------------|----------------|------------------------------|--------|-------------------------|----------------|------------------|
| Foot traffic | Roll width | Total Thickness | Thickness of ware layer | Fire resistant | Slip resistant | Static electrical propensity | Weight | Expansion & contraction | Wear resistant | Sound absorption |
|              |            |                 |                         |                |                |                              |        |                         |                |                  |
|              |            |                 |                         |                |                |                              |        |                         |                |                  |





# LIGHT COMMERCIAL

## MFVS238.G / MFVS338.G **GLACIER**



**888 . 88**  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic

Roll width

Total Thickness

Thickness of wear layer

Fire resistant

Slip resistant



Static electrical propensity

Weight

Expansion & contraction

Wear resistant

Sound absorption



2 m, 3 m

3,8 mm

0,3 mm

2,00 kg/m<sup>2</sup> max 0,4%

+19dB

**10**  
Wear  
Warranty















**SUPERIOR VINYL**

**RESIDENTIAL**



LOWEST VOC EMISSION RATING




- |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Foot traffic                                                                       | Roll width                                                                          | Total Thickness                                                                     | Thickness of wear layer                                                             | Fire resistant                                                                       | Slip resistant                                                                        | Static electrical propensity                                                          | Weight                                                                                | Expansion & contraction                                                               | Wear resistant                                                                        | Sound absorption                                                                      |
|  |  |  |  |  |  |  |  |  |  |  |
|                                                                                    |                                                                                     | 2 m, 3 m                                                                            | 3,0 mm                                                                              | 0,2 mm                                                                               | B <sub>fl-s1</sub>                                                                    | DS                                                                                    | 1,95 kg/m <sup>2</sup>                                                                | max 0,4%                                                                              |                                                                                       | +18dB                                                                                 |
|                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |  |





# RESIDENTIAL

## MFVS23.N / MFVS33.N NOUGAT

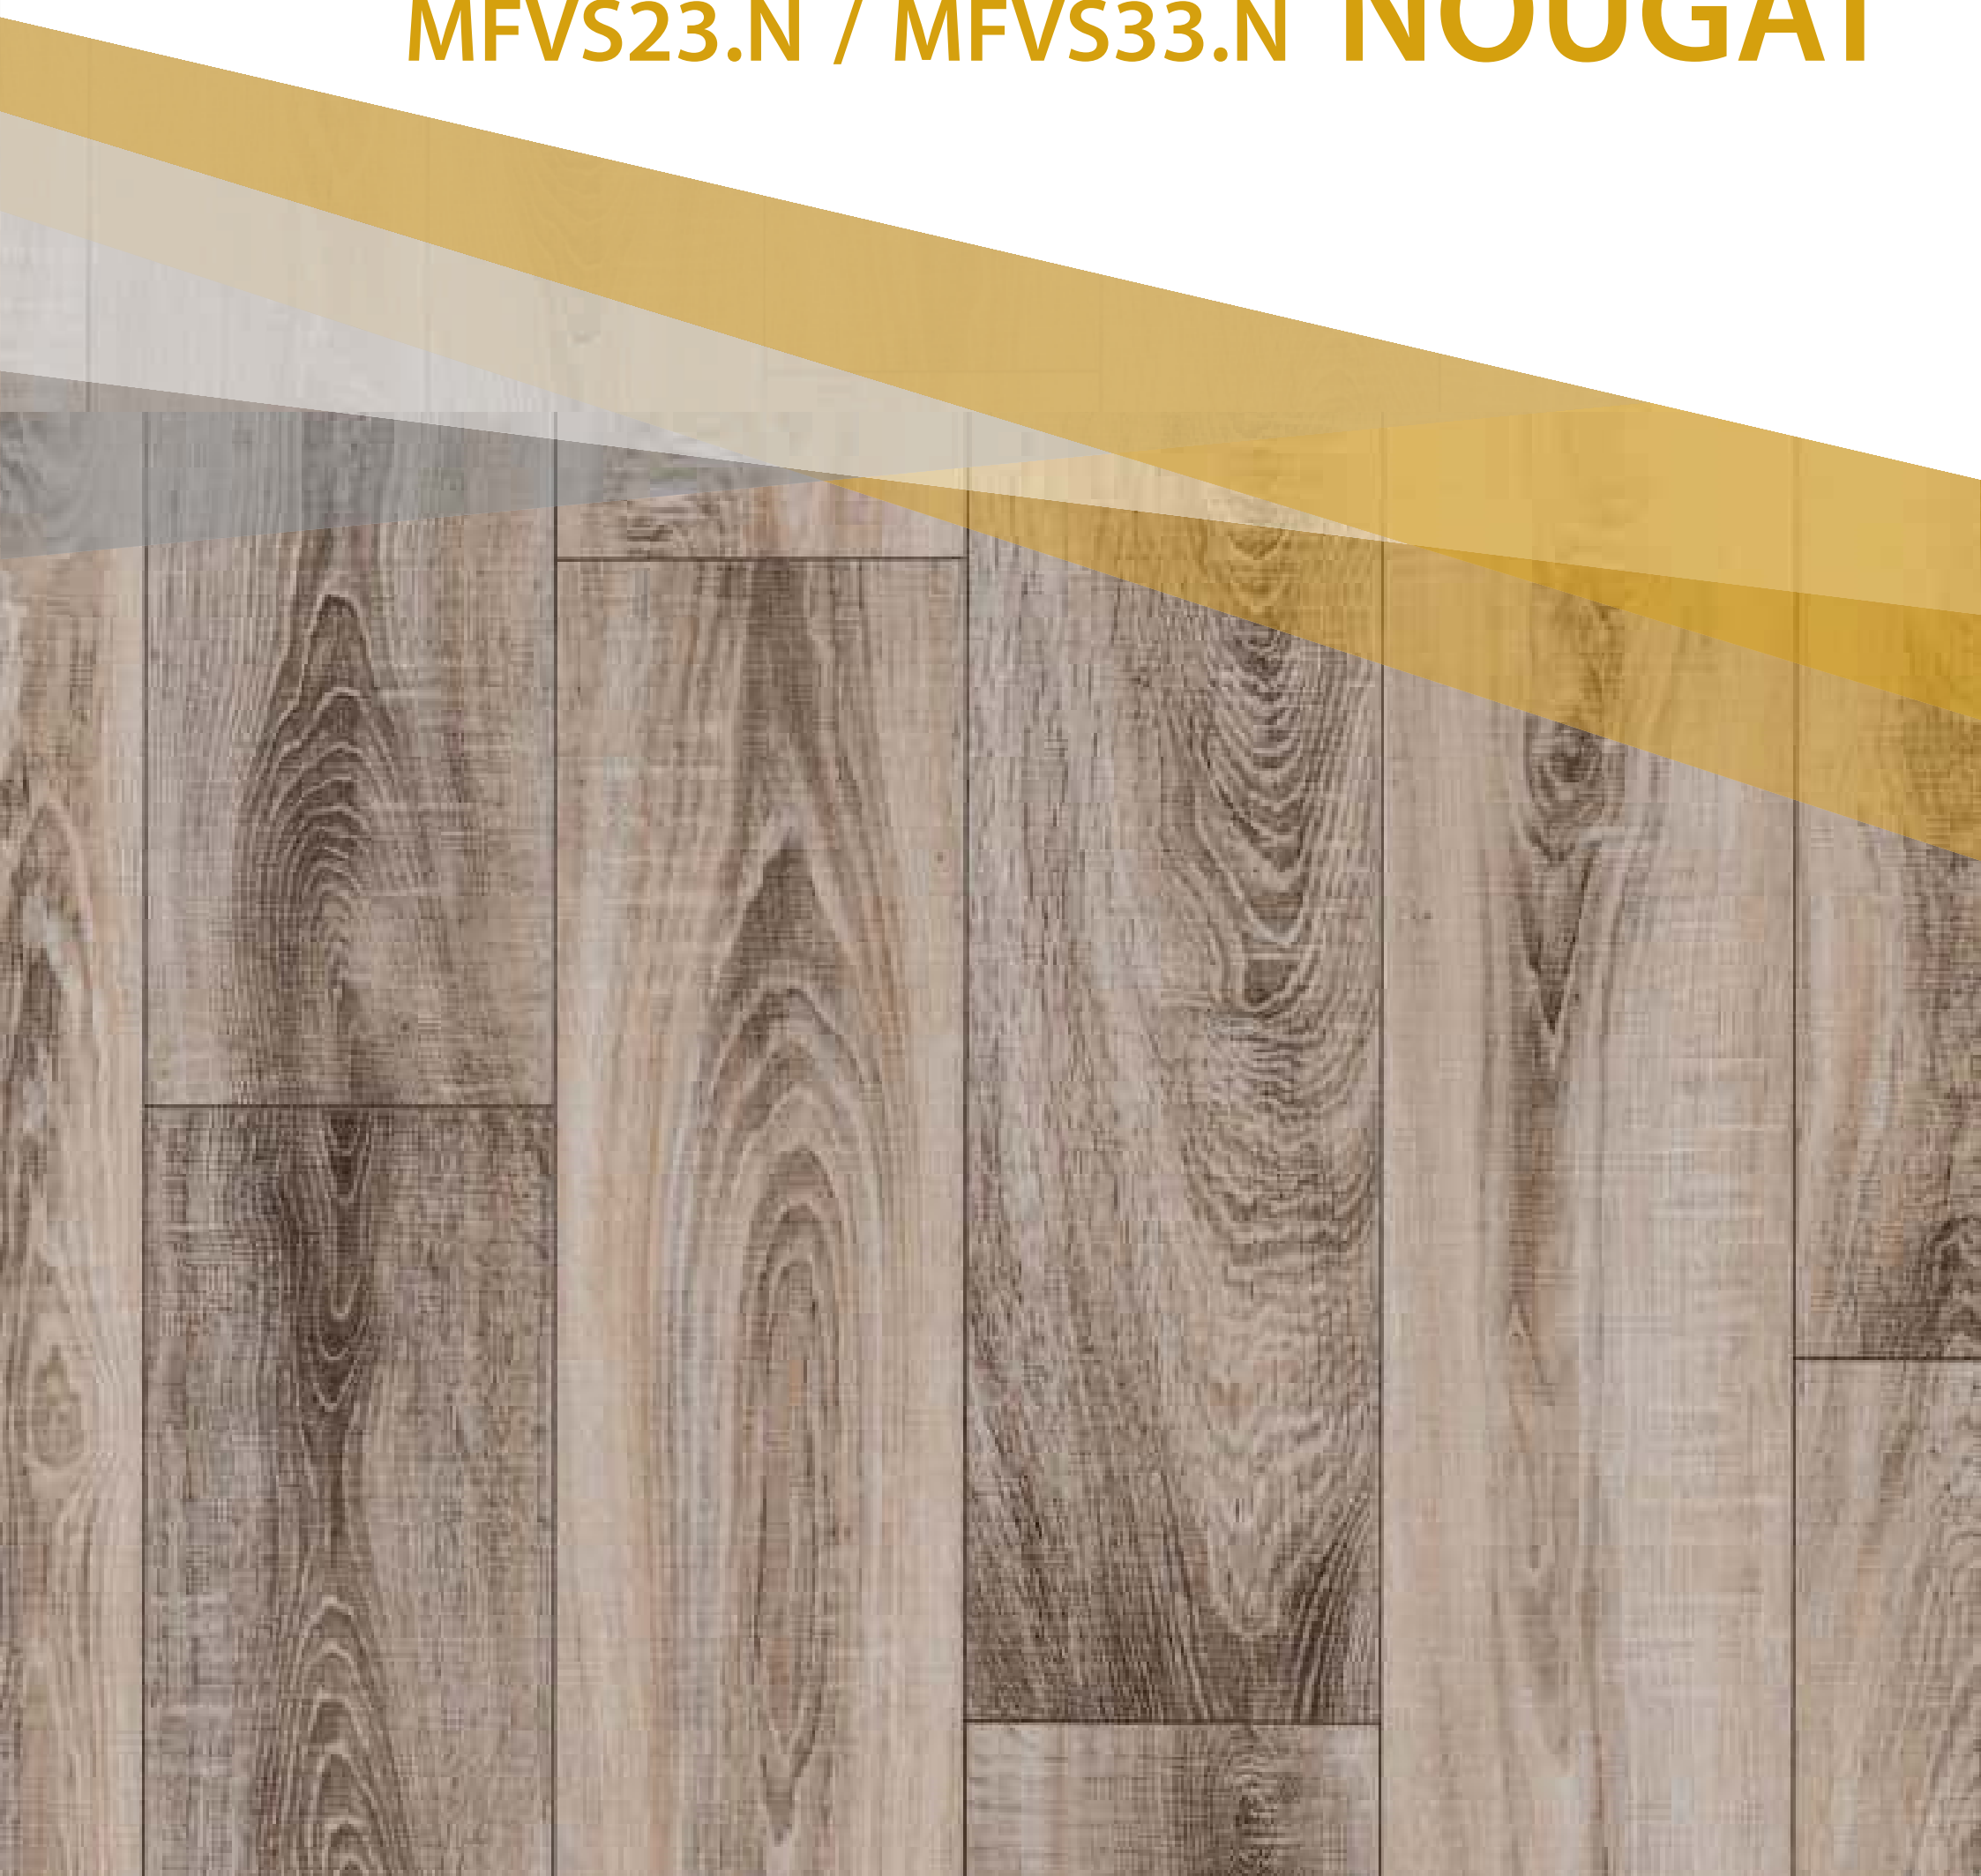

888.88

RAND PER SQUARE METER

LOWEST VOC EMISSION RATING



Foot traffic

Roll width

Total Thickness

Thickness of ware layer

Fire resistant

Slip resistant


Static electrical propensity

Weight

Expansion & contraction

Wear resistant

Sound absorption



2 m, 3 m

3,0 mm

0,2 mm

Bfl-s1

DS

1,95 kg/m<sup>2</sup>

max 0,4%

T

+18dB

8

Year Warranty





# RESIDENTIAL

## MFVS23.C / MFVS33.C COCONUT



888 . 88  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic

Roll width

Total Thickness

Thickness of ware layer

Fire resistant

Slip resistant

Static electrical propensity

Weight

Expansion & contraction

Wear resistant

Sound absorption



2 m, 3 m

3,0 mm

0,2 mm

Bfl-s1

DS

1,95 kg/m<sup>2</sup> max 0,4%

T

+18dB

8  
Wear  
Warranty



**SUPERIOR VINYL**

**DOMESTIC**



LOWEST VOC  
EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



2,5 mm

Thickness of wear layer



0,15 mm

Fire resistant



Slip resistant



Static electrical propensity




Weight



1,62 kg/m<sup>2</sup>

Expansion & contraction



max 0,4%

Wear resistant




**6**  
Wear  
Warranty





# DOMESTIC

## MFVS225.AP / MFVS325.AP ALPINE PARQUET

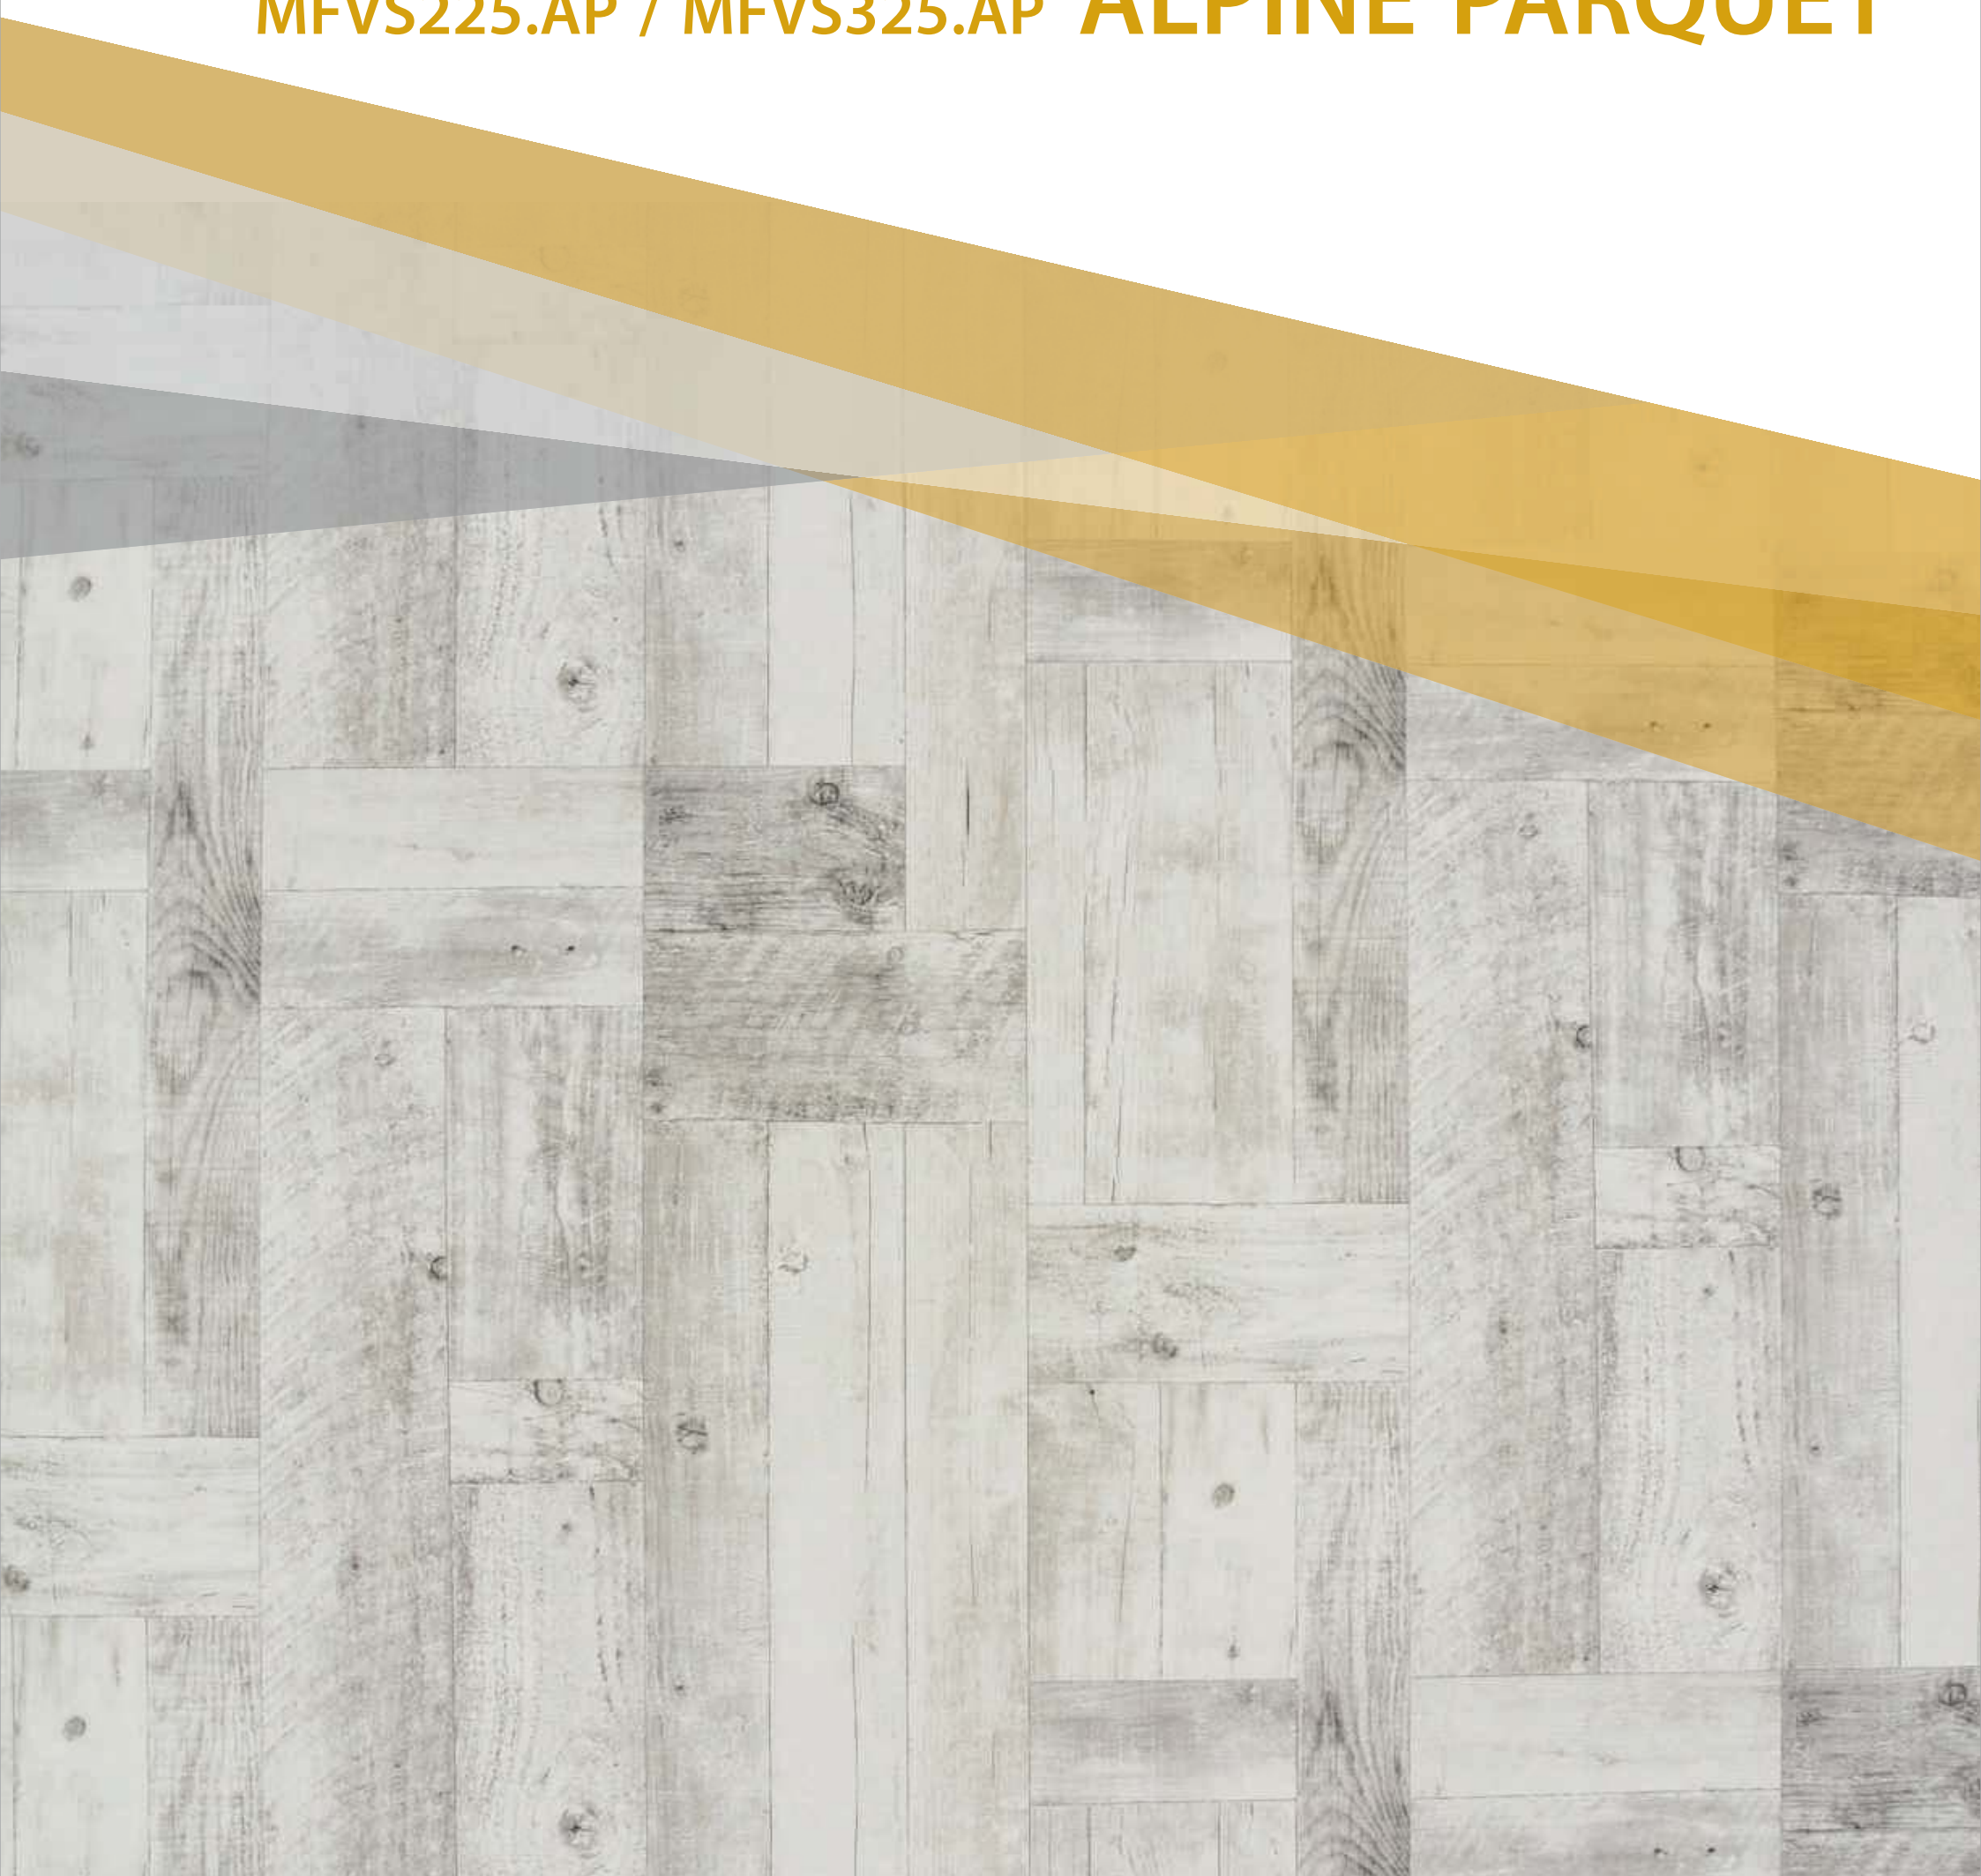

888 . 88

RAND PER SQUARE METER

LOWEST VOC EMISSION RATING



Foot traffic

Roll width

Total Thickness

Thickness of wear layer

Fire resistant


Slip resistant

Static electrical propensity

Weight

Expansion & contraction

Wear resistant

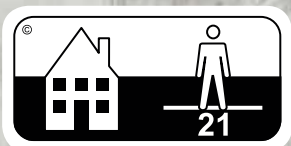

2 m, 3 m

2,5 mm

0,15 mm

1,62 kg/m<sup>2</sup> max 0,4%

6

Wear Warranty





# DOMESTIC

## MFVS225.IC / MFVS325.IC ICE CREAM

888 . 88

RAND PER SQUARE METER

LOWEST VOC EMISSION RATING



Foot traffic

Roll width

Total Thickness

Thickness of wear layer

Fire resistant


Slip resistant

Static electrical propensity

Weight

Expansion & contraction

Wear resistant

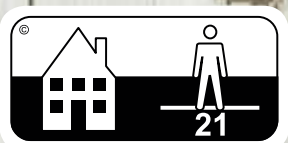

2 m, 3 m



2,5 mm



0,15 mm



1,62 kg/m<sup>2</sup>



max 0,4%



Wear Warranty





# DOMESTIC

## MFVS225.MS / MFVS325.MS MAPLE SYRUP

888 . 88

RAND PER SQUARE METER

LOWEST VOC EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



2,5 mm

Thickness of wear layer




0,15 mm

Fire resistant



Cfl-s1

Slip resistant



DS

Static electrical propensity



1,62 kg/m<sup>2</sup>

Weight



max 0,4%

Expansion & contraction



Wear resistant




6  
Wear  
Warranty





# DOMESTIC

MFVS225.HB / MFVS325.HB **HERRINGBONE BROWN**

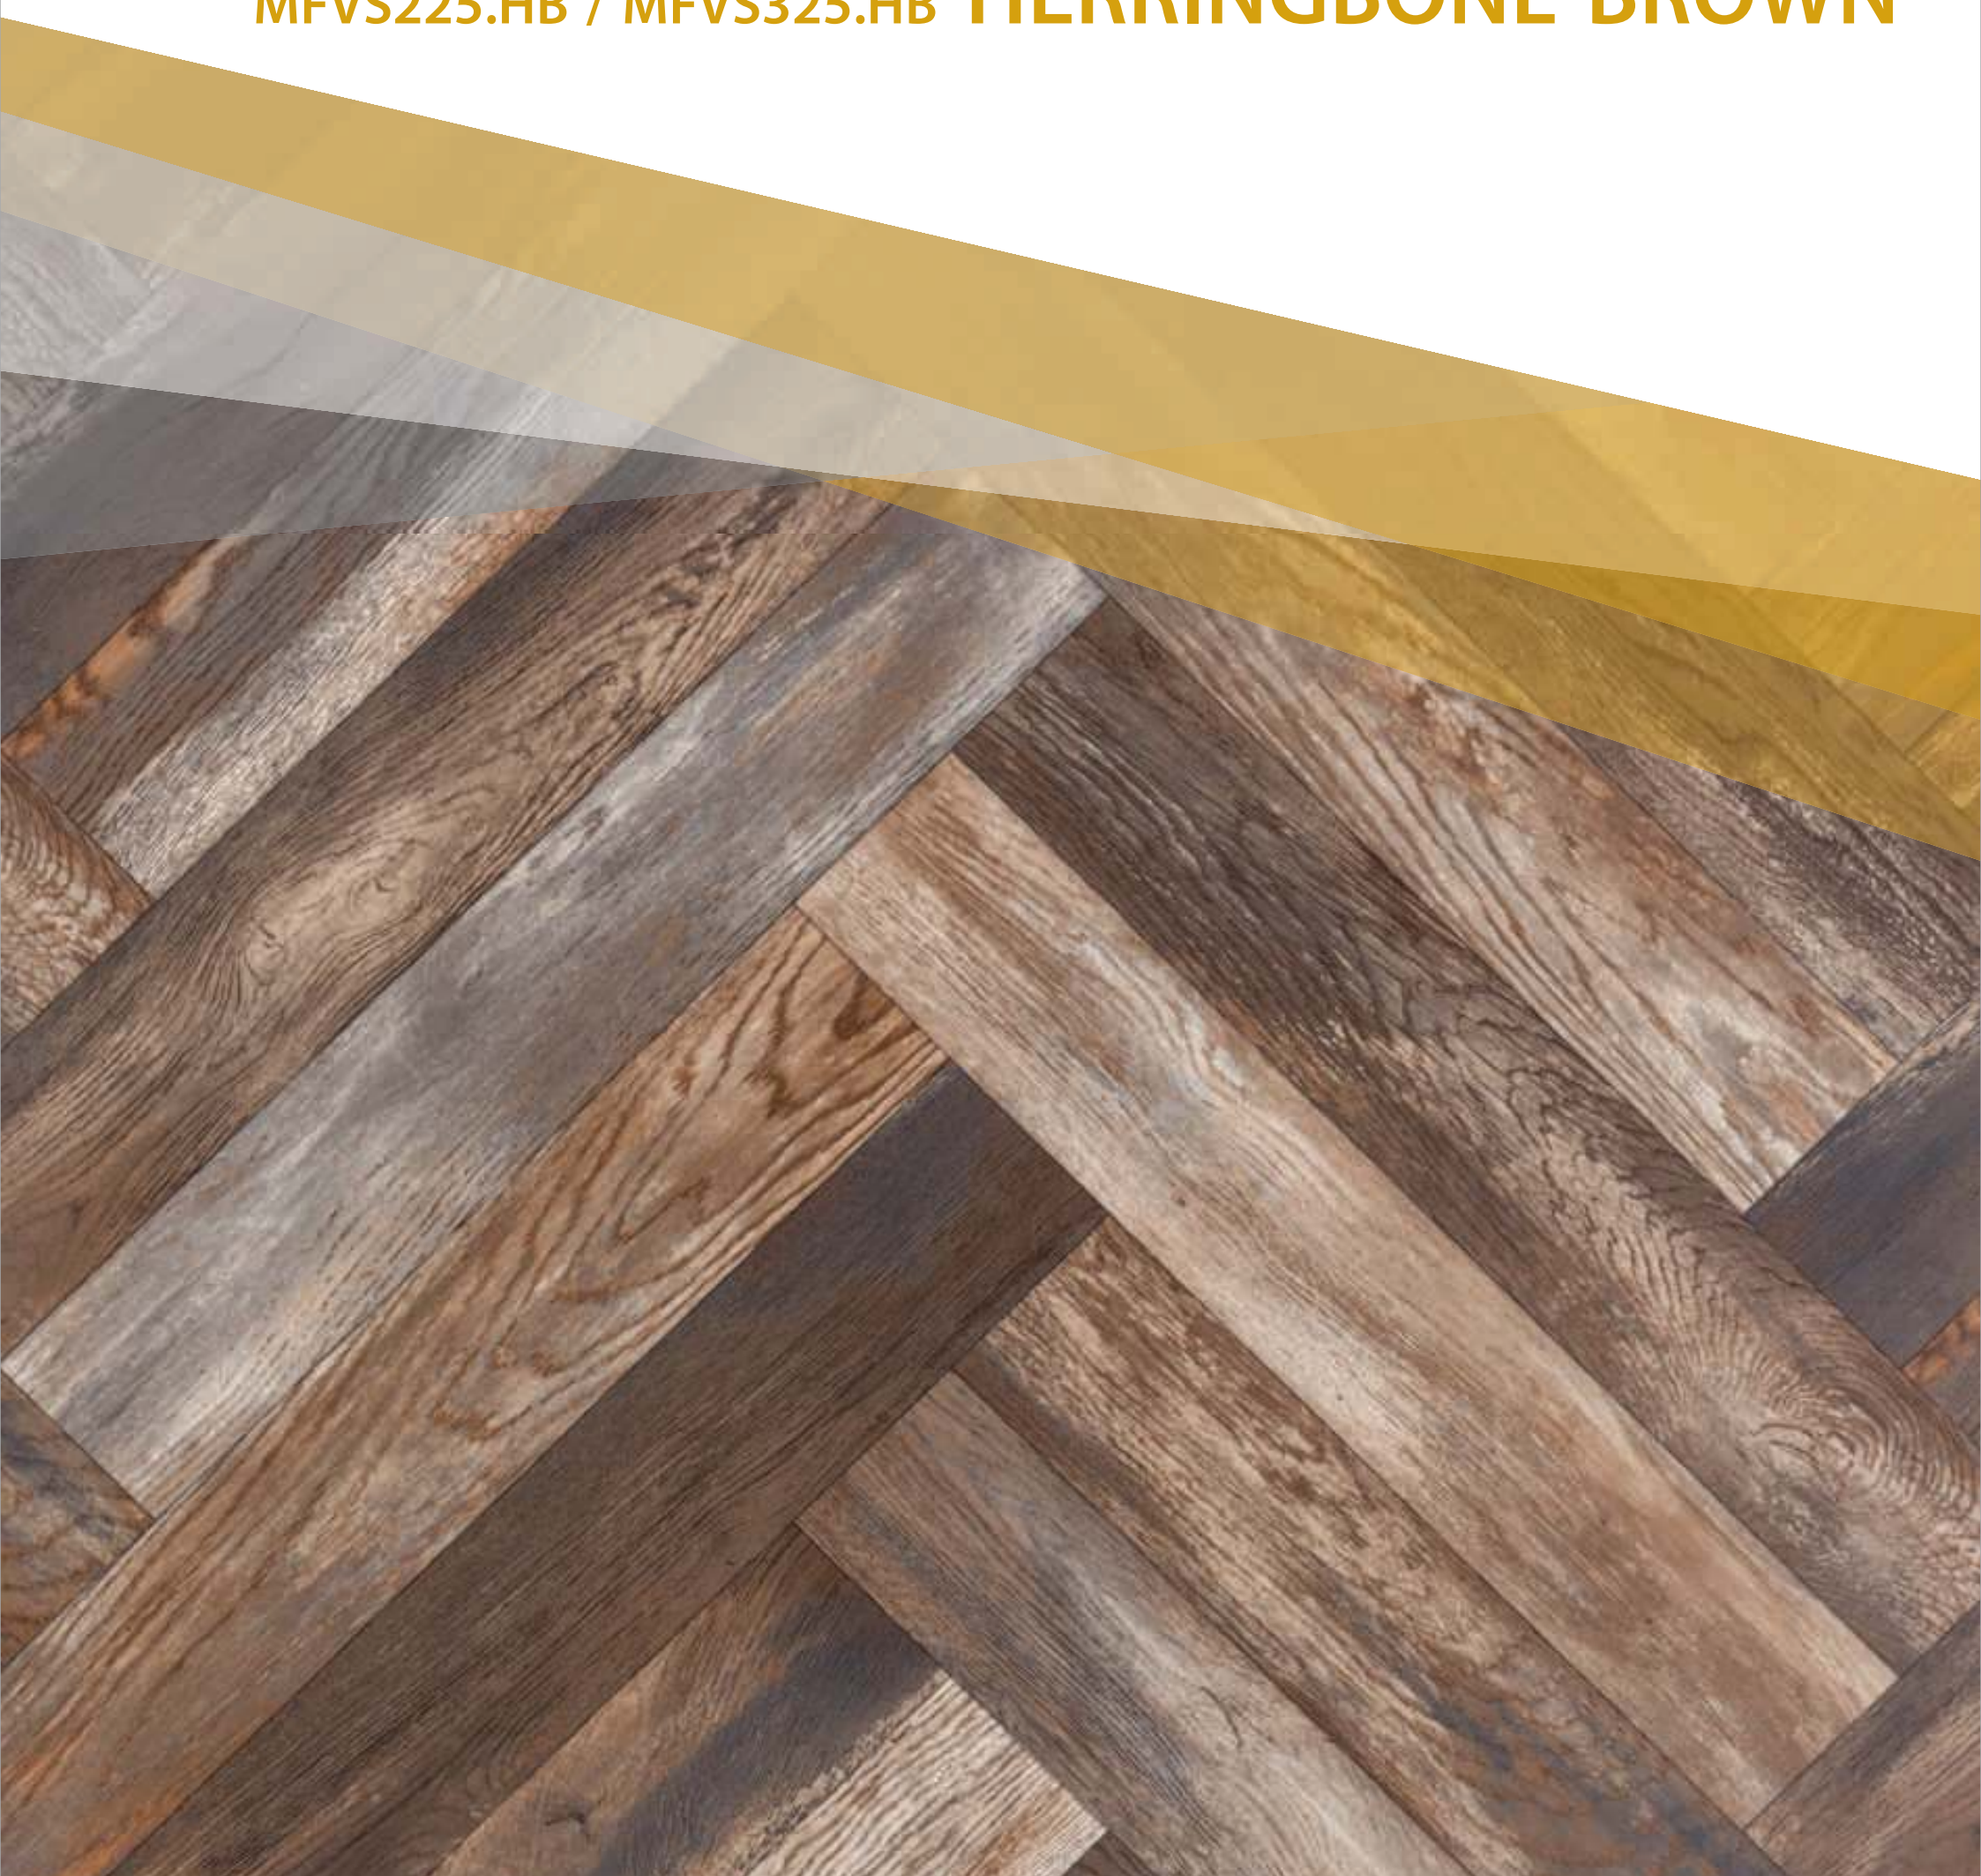


888 . 88

RAND PER SQUARE METER

LOWEST VOC EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



2,5 mm

Thickness of wear layer



0,15 mm

Fire resistant



Slip resistant



Static electrical propensity



Weight



1,62 kg/m<sup>2</sup>

Expansion & contraction



max 0,4%

Wear resistant



6  
Wear  
Warranty





# DOMESTIC

MFVS225.HG / MFVS325.HG **HERRINGBONE GREY**



888 . 88  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic	Roll width	Total Thickness	Thickness of ware layer	Fire resistant	Slip resistant	Static electrical propensity	Weight	Expansion & contraction	Wear resistant
	2 m, 3 m	2,5 mm	0,15 mm				1,62 kg/m <sup>2</sup>	max 0,4%	





# DOMESTIC

MFVS225.N / MFVS325.N **NORI**



888 . 88

RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



2,5 mm

Thickness of wear layer



0,15 mm

Fire resistant



Slip resistant



Static electrical propensity



Weight



1,62 kg/m<sup>2</sup>

Expansion & contraction



max 0,4%

Wear resistant




6  
Wear  
Warranty





# DOMESTIC

## MFVS225.AF / MFVS325.AF ARCTIC FOX

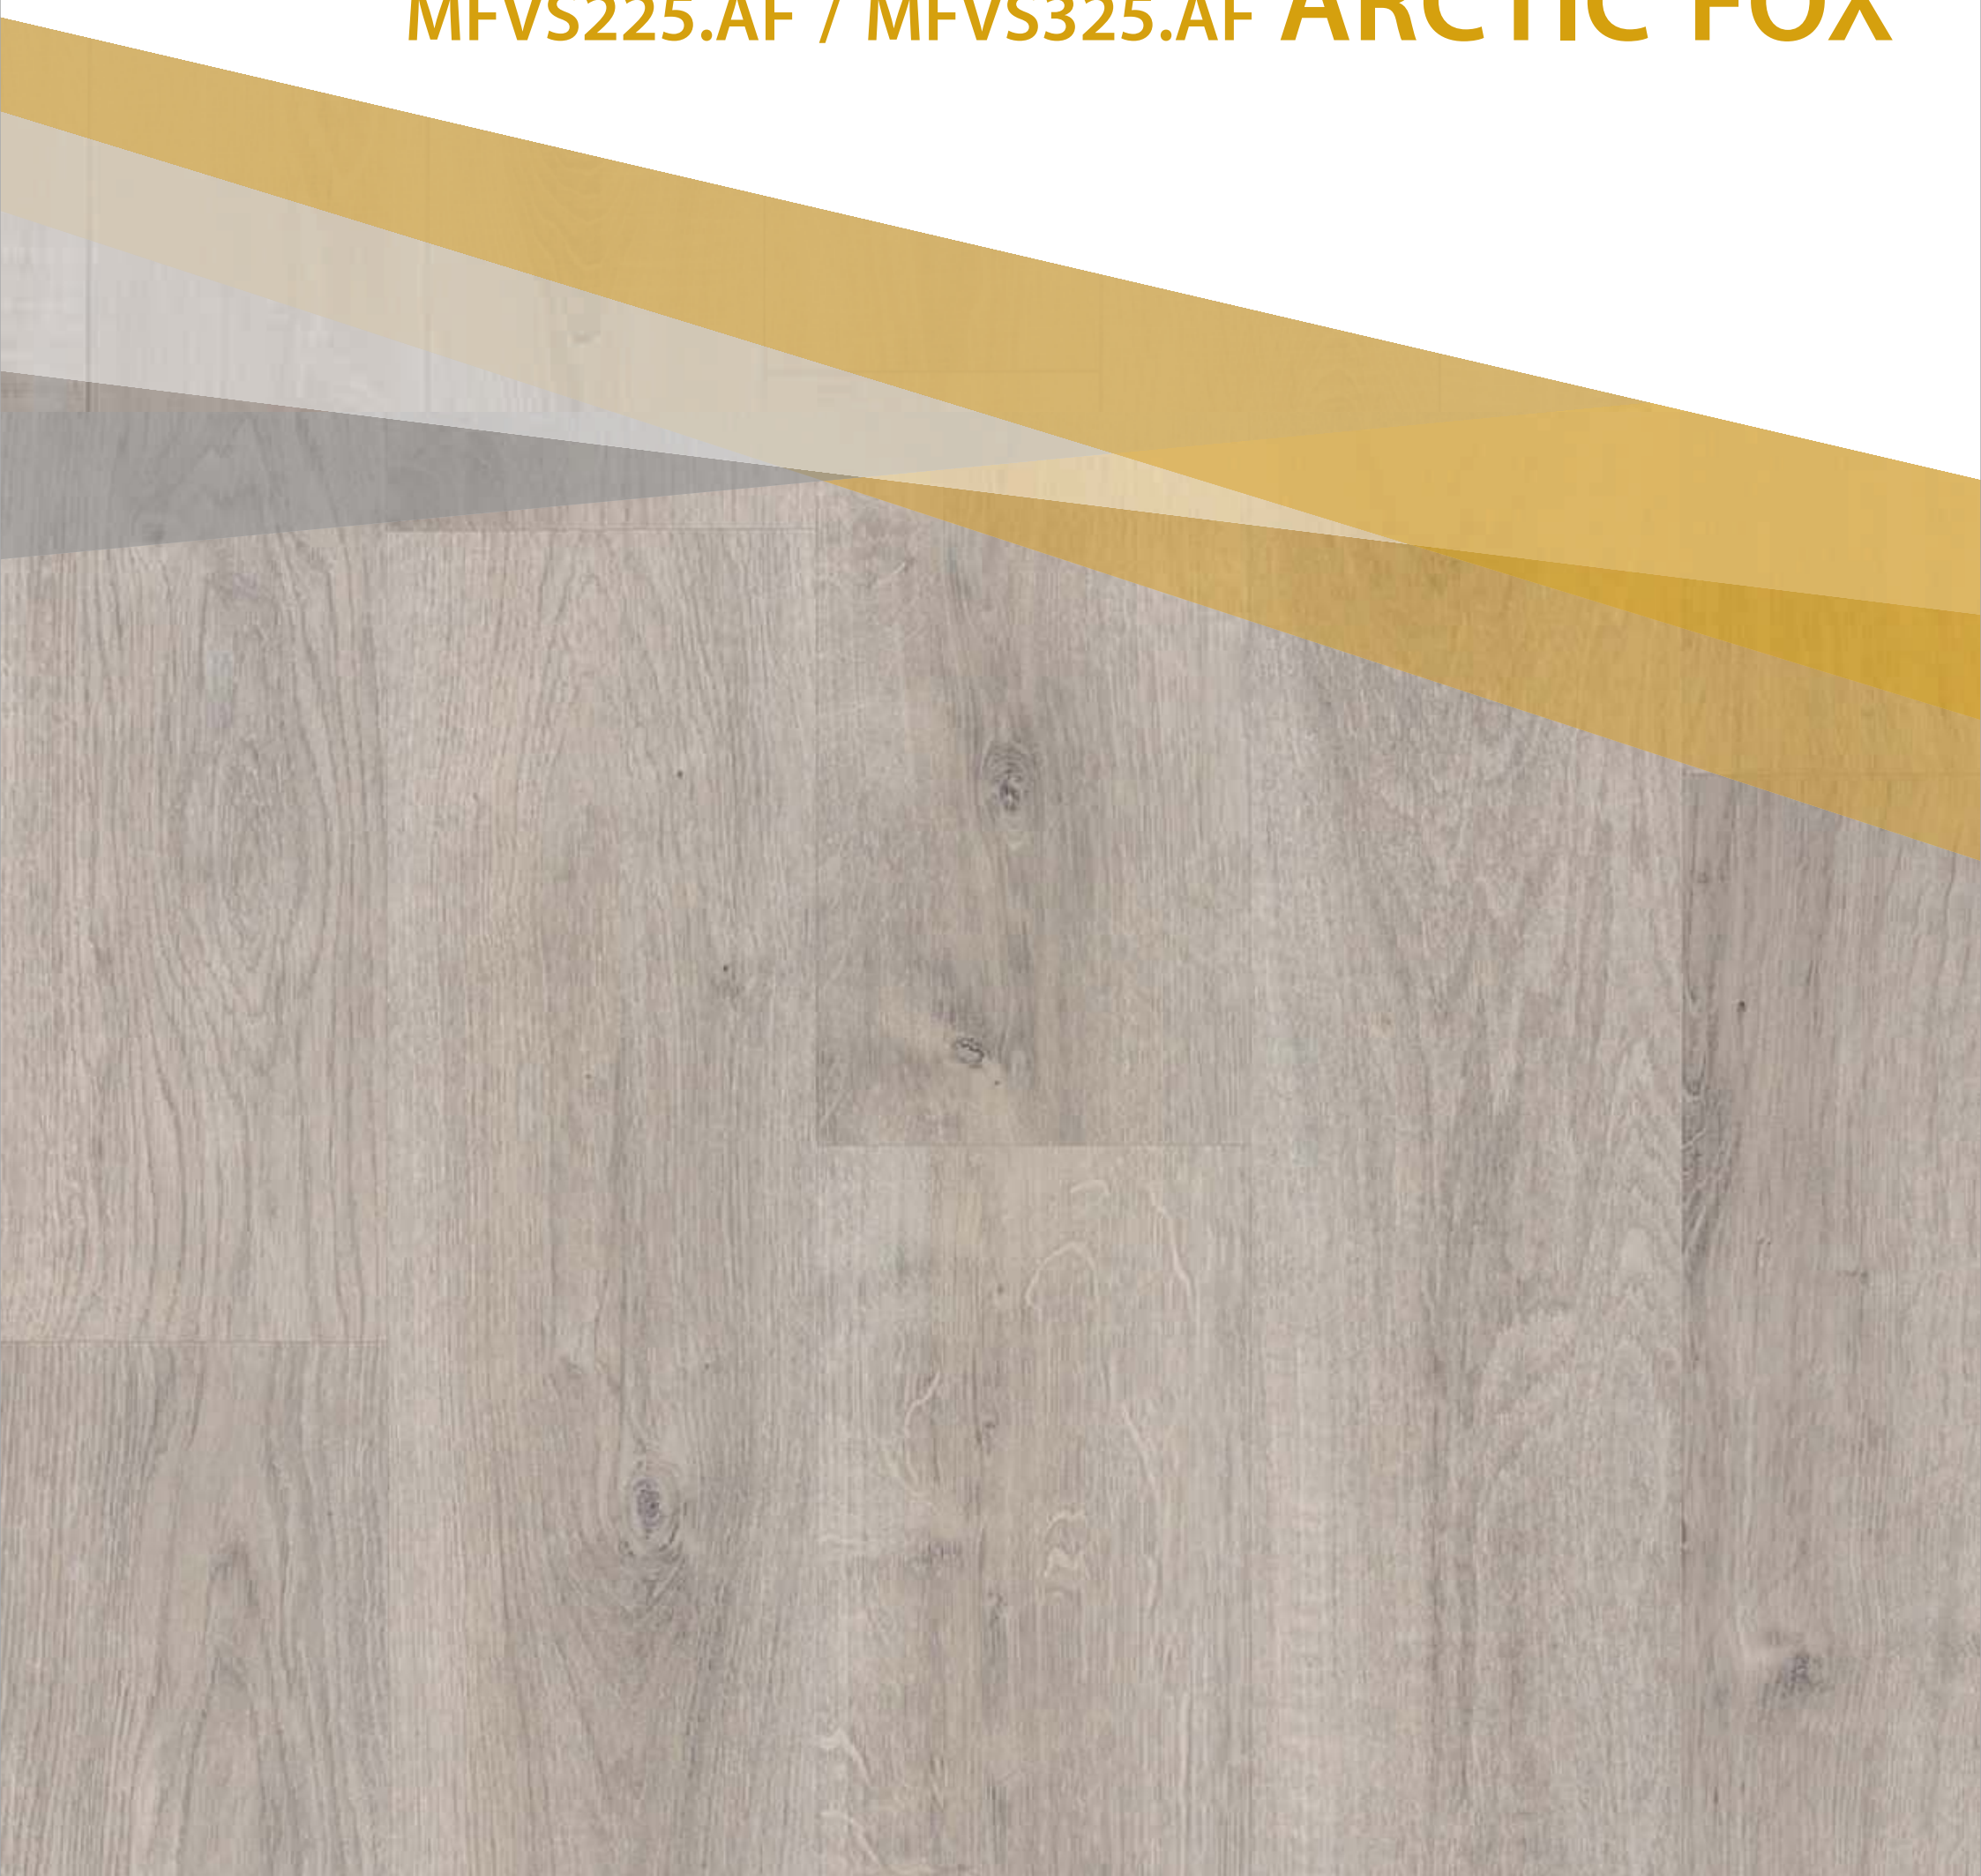

888 . 88  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



2,5 mm

Thickness of wear layer



0,15 mm

Fire resistant



Cfl-s1

Slip resistant



DS

Static electrical propensity



1,62 kg/m<sup>2</sup>

Weight



max 0,4%

Expansion & contraction



Wear resistant



6




Wear Warranty





# DOMESTIC

## MFVS225.RR / MFVS325.RR **ROCKY ROAD**

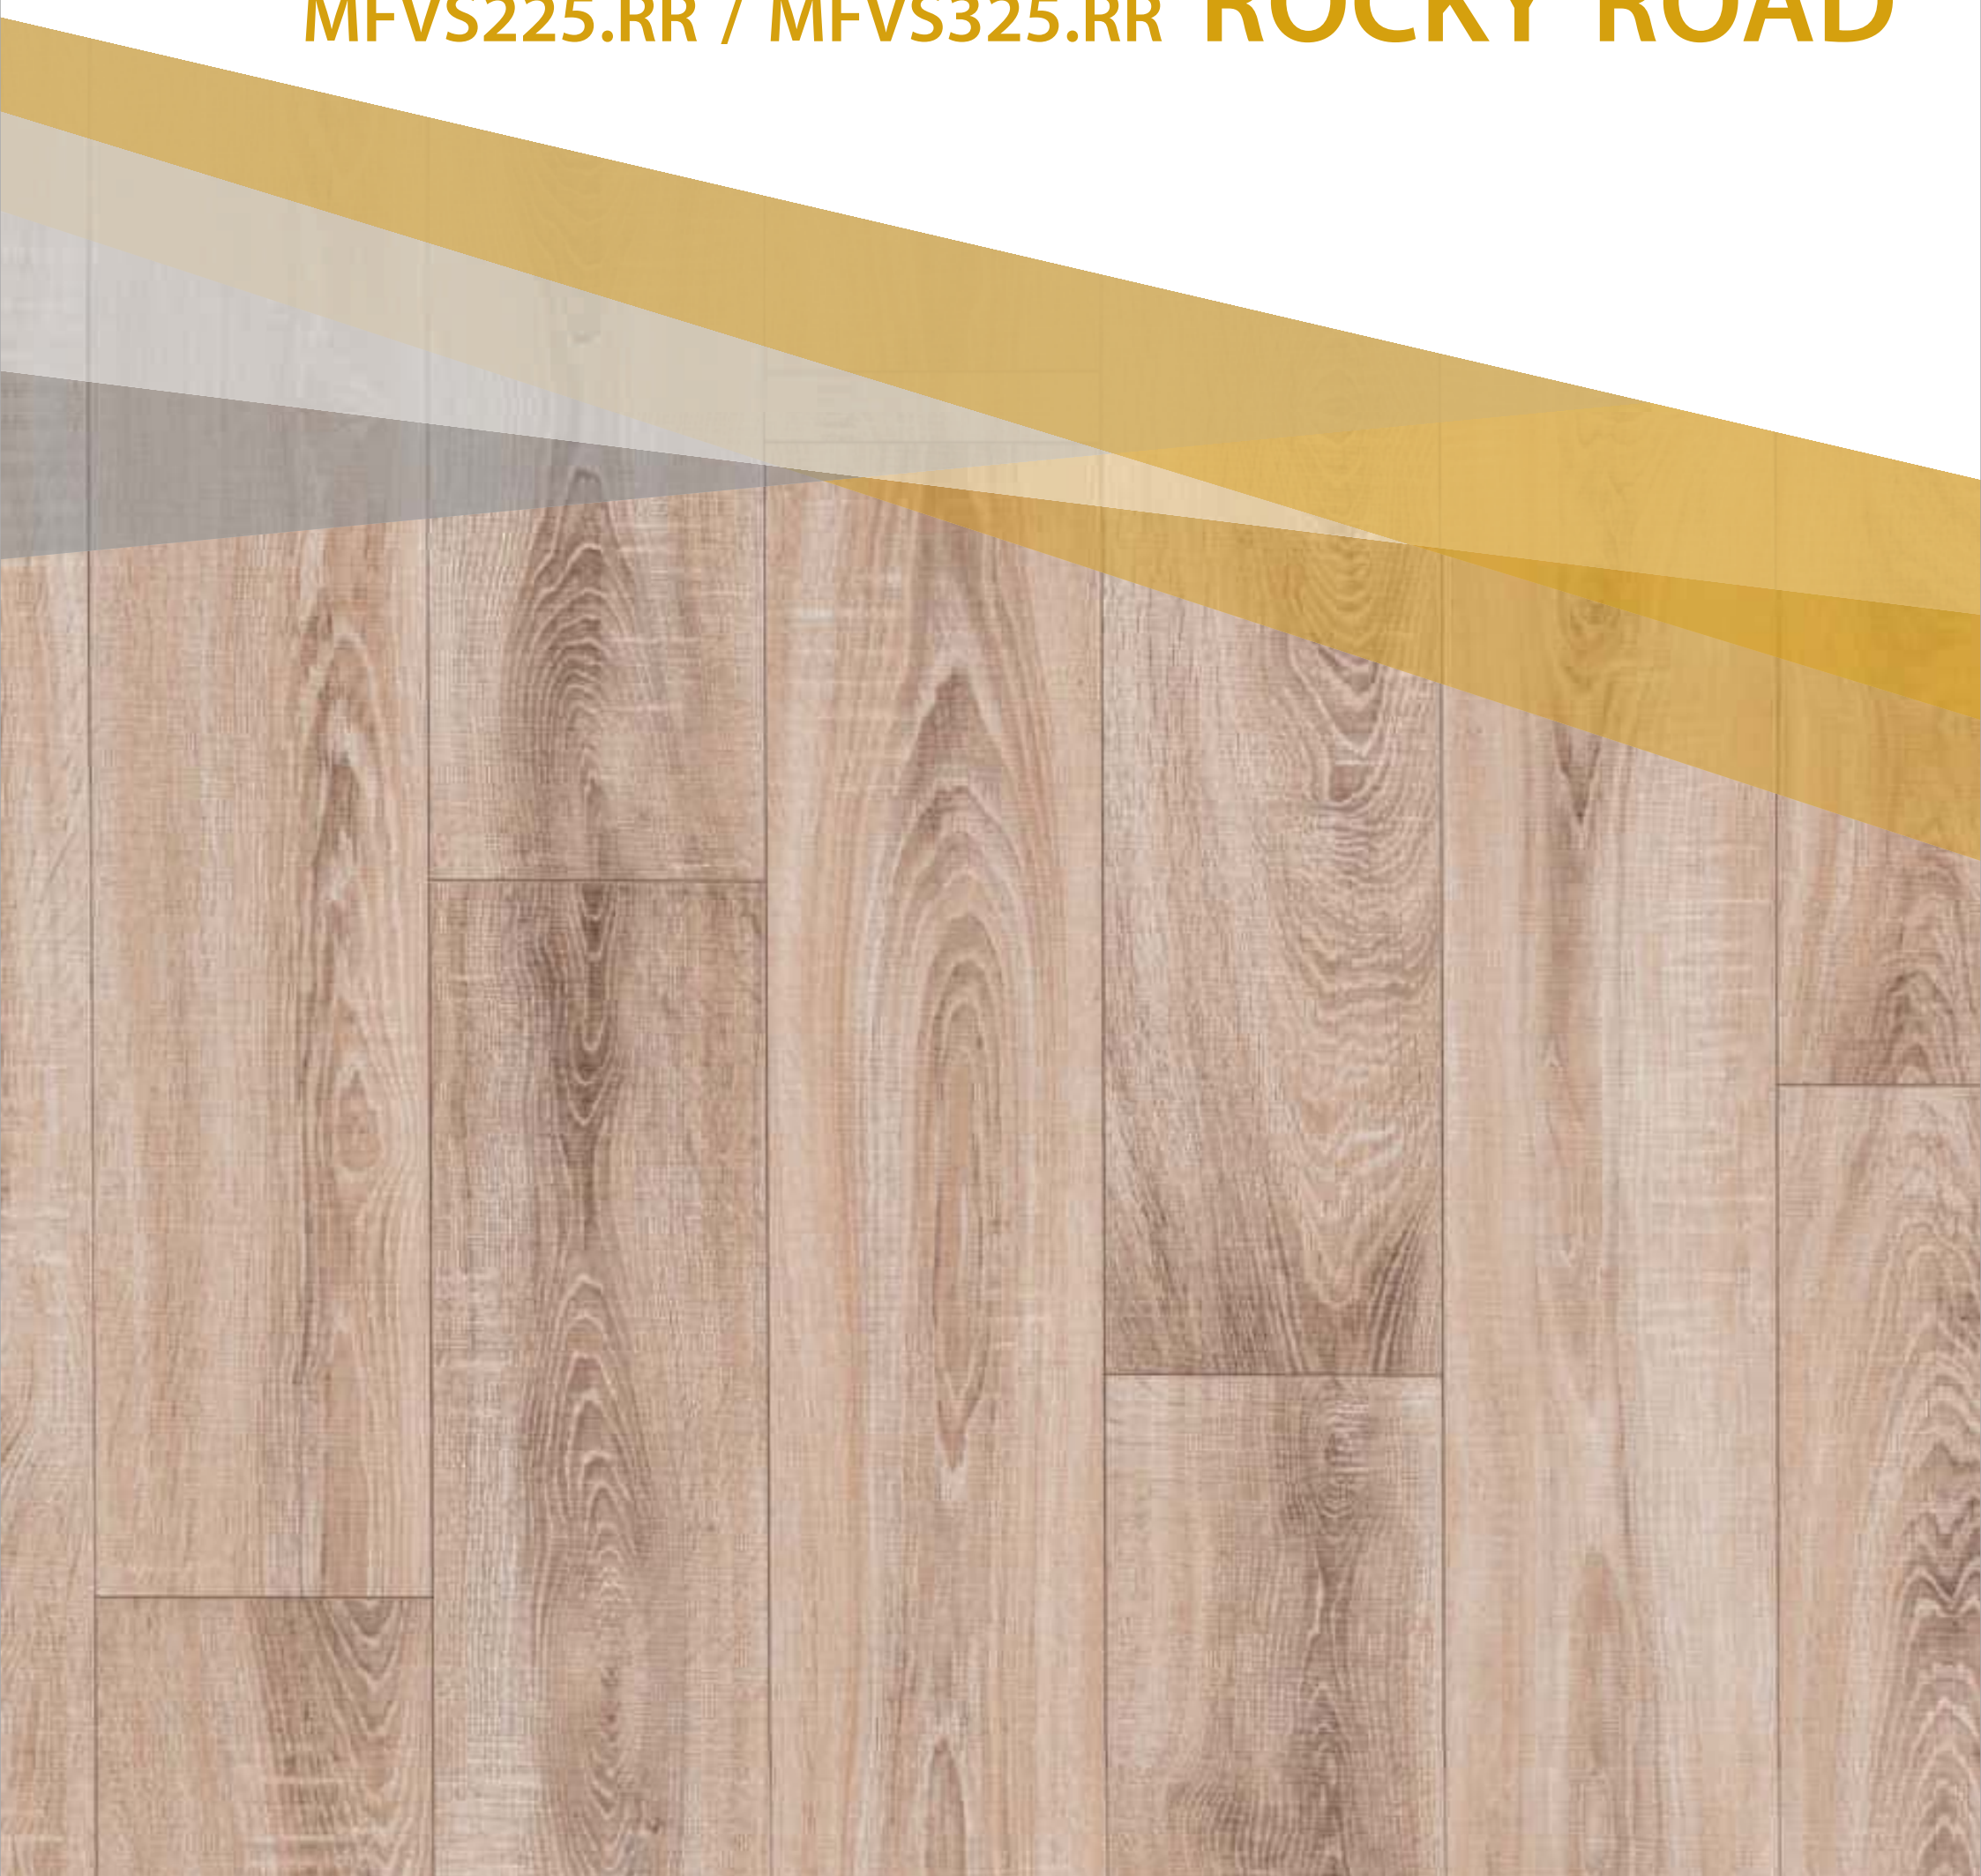

888 . 88  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic

Roll width

Total Thickness

Thickness of wear layer

Fire resistant


Slip resistant

Static electrical propensity

Weight

Expansion & contraction

Wear resistant

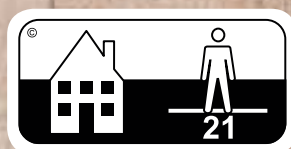

2 m, 3 m

2,5 mm

0,15 mm

Cfl-s1

DS

1,62 kg/m<sup>2</sup>

max 0,4%

T

6  
Wear  
Warranty



# DOMESTIC

MFVS225.CB / MFVS325.CB **CHESS BOARD**


888 . 88

RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



2,5 mm

Thickness of wear layer




0,15 mm

Fire resistant



Cfl-s1

Slip resistant



DS

Static electrical propensity



Weight



1,62 kg/m<sup>2</sup>

Expansion & contraction



max 0,4%

Wear resistant



6  
Wear  
Warranty





**M**  
**FLOORS**  
 LAMINATE & VINYL SOLUTIONS

**SUPERIOR VINYL**


**ECCONNO**



LOWEST VOC EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



1,3 mm

Thickness of wear layer



0,15 mm

Fire resistant



Slip resistant



Static electrical propensity



Weight



1,25 kg/m<sup>2</sup>

Expansion & contraction



max 0,4%

Wear resistant



5  
Wear  
Warranty



# ECONO

MFVS213.A / MFVS313.A **ALPINE**

888 . 88  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



1,3 mm

Thickness of wear layer




0,15 mm

Fire resistant



Bfl-s1

Slip resistant



DS

Static electrical propensity



Weight



1,25 kg/m<sup>2</sup>

Expansion & contraction



max 0,4%

Wear resistant



5  
Wear  
Warranty



# ECONO

MFVS213.T / MFVS313.T **TOFFEE**

888 . 88  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



1,3 mm

Thickness of wear layer



0,15 mm

Fire resistant



Bfl-s1

Slip resistant



DS

Static electrical propensity



1,25 kg/m<sup>2</sup>

Weight



max 0,4%

Expansion & contraction



Wear resistant

Wear resistant



5  
Wear  
Warranty



5  
Wear  
Warranty



# ECONO


MFVS213.CM / MFVS313.CM **CREAMY MAPLE**

888 . 88  
RAND PER SQUARE METER

LOWEST VOC  
EMISSION RATING



Foot traffic



Roll width



2 m, 3 m

Total Thickness



1,3 mm

Thickness of wear layer



0,15 mm

Fire resistant



Slip resistant



Static electrical propensity



Weight



1,25 kg/m<sup>2</sup>

Expansion & contraction



max 0,4%

Wear resistant



5  
Wear  
Warranty